




POINT HELIDECK LIGHTS PRL-AX-LSM LED v4 ATEX-IECEX ZONE 1 & 2

Compliances: IECEx Listed: Ex eb mb IIC T5 Gb -55 to +55-deg C
 ATEX Listed:  II 2 G Ex e mb IIC T5 Gb
 Notified Body: 0518 Sira Testing & Certification Ltd.
 Tested & Certified to IP66, IP67 & IP69 Ingress Protection
 UK CAA CAP 437 ed. 8 (2016), Chapter 4 & Appendix C
 Registered ISO 9001:2015
 American Bureau of Shipping (ABS) Type Approved Product
 ABS Green Passport per MEPC179 (59)
 IMO 2009 MODU Code (2010) paragraph 13.5.20
 Transport Canada TP14371, AGA 7.17
 FAA AC 150/5390-2B Heliport Design Guide
 ICAO Annex 14, Volume II



The PRL-AX-LSM is an 8-inch diameter surface mounted light *only 146mm high* used for metal helidecks or existing pavement heliports on the FATO perimeter. Only 2.2 watts and 3.5 VA at 120V.

- The castings are copper-free (< 0.25%) aluminum.
- The hardware is 316 (A4) stainless steel.
- ATEX & IECEx tested and listed.
- Standard with the exclusive Point Lighting Marine Treatment finish that is bonded to the metal and far exceeds the corrosion resistance of the standard FAA approved finish. See below.
- The lens is glass.
- The LED's are rated for 100,000 hours.
- IP66 & IP67 tested and listed.

Point Type	Voltage	Array	Color	ATEX	Mounting	Options
PRL-97004	1: 120v ^ 2: 220v 3: 12v DC 4: 24v DC	C: Helideck	G: Green Y: Yellow W: White B: Blue R: Red	AX: ATEX & IECEx Zone 1 Zone 2	LSM: Low Surface Mount	M20: Metric M20 M25: Metric M25 NC: Night Vision Compatibility**

Note: Array C brightness exceeds ICAO Annex 14 & meets CAP 437.
 * For use with visible (non-IR) array; adds IR LEDs.
 ^ Operates properly using 110v DC and 125v DC.

Listed: SIRA 10ATEX5240X
 IECEx SIR 15.0110X
 T ambient: -55 to +55 deg C
 Operating: -55 to +55 deg C
 Frequency: 50/60 Hz
 LED average life: 100,000 hours
 Ingress Rating: IP66, IP67 & IP69


PRL-97004-2C-G-AX-LSM



Our Marine Treatment tolerates marine, high salt content air and other corrosive environments.

The fixture shall be treated for marine conditions by cleaning per US Department of Defense TT-C-490 method III, pretreated with chrome-free aluminum conversion coating per US MIL-C-5541 type II, epoxy powder base coat primer and glossy polyester powder coat finish in color RAL 6003 (FED-STD-595 color #14097) dark green. Powder coating per US Department of Defense MIL-PRF-24712A type VI and oven cured.



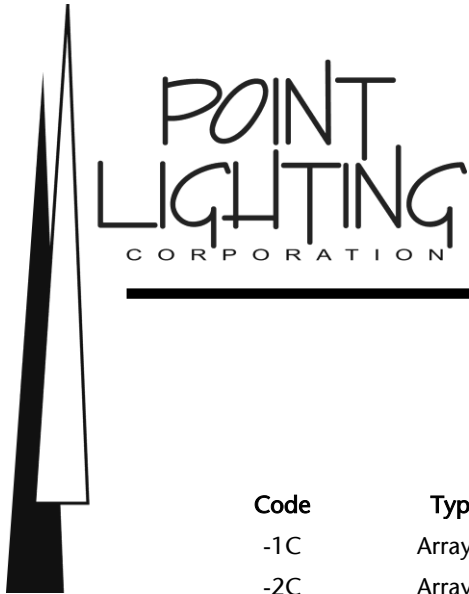

POINT HELIDECK LIGHTS PRL-AX-LSM LED v4 ATEX ZONE 1 & 2


POWER CONSUMPTION

Code	Type	Voltage	Frequency	Watts*	VA*
-1C	Array C	120 AC	50/60 Hz	2.2	3.5
-2C	Array C	220 AC	50/60 Hz	2.5	5.8
-3C	Array C	12 DC	---	2.1	---
-4C	Array C	24 DC	---	2.5	---

*Power consumption for AC units includes the effect of the unit's power factor which accounts for the difference between watts and volt-amperes. Measurements were made at the nominal AC voltages. The operating range for 120v units is 93 - 144v. The operating range for 220v units is 176 - 250v.

RECOMMENDED TOOLS

Point Lighting Corporation recommends return for factory repair and refurbishment of LED PRL-AX lights

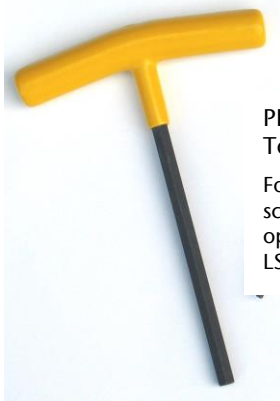

PL10860
Tool, T-handle Wrench

For the three socket head screws fixing the PRL optical subassembly to the LSM mounting base.



Replacement Parts

The optical subassembly is not serviceable in the field. Contact Point Lighting for more information.

PL10049-4-AX Gasket ATEX, Base
PL10524-125 Screw, Socket Head
PL10860 Tool, T-handle wrench

Instruction Sheet: IS97004-AX-LSM

Housing Dia: 8.0 (203)
Height: 5.75 (146)
Bolt Circle (4): 9.75 (248)
Bolt Hole diam: 0.406-inch
10.3 mm

Weight: 12.0 lbs 5.5 kg

POINT LIGHTING CORPORATION

Mail: P.O. Box 686, Simsbury, CT 06070
Tel 01 860.243.0600
email: Info@PointLighting.com

Plant: 61-65 W. Dudley Town Rd, Bloomfield, CT
USA Fax 01 860.243.0665
website: www.PointLighting.com